



St. St. quick release couplers and adapters DN12

The stainless steel quick release couplers and adapters simplify the connection of water guns and hoses, Lances and other accessories. The EPDM rubber protections, available in different colours, will avoid damage of the couplers and the floors when dropping on the floor.










Technical data

Body/Ring	: AISI 303
Spring/safety ring	: AISI 301
Balls	: AISI 316L
Seals	: VITON (FDA)
Max. pressure	: 200 bar
Max. temperature	: 100 °C

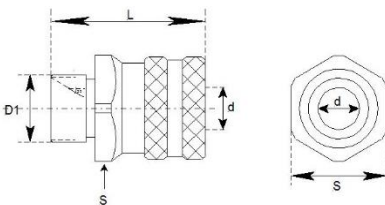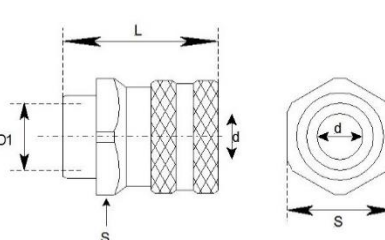Quick release couplers		Article no.	L (mm)	d (mm)	D1 (BSP)	S (mm)
 COUPL3/8-M COUPL1/2-M		COUPL3/8-M COUPL1/2-M	49,5 49,5	10,0 11,8	3/8" M 1/2" M	30 30
 COUPL1/4-F COUPL3/8-F COUPL1/2-F COUPL3/4-F		COUPL1/4-F COUPL3/8-F COUPL1/2-F COUPL3/4-F	44,0 44,0 44,0 44,0	11,8 11,8 11,8 11,8	1/4" F 3/8" F 1/2" F 3/4" F	30 30 30 32
 COPROT1-B (blue) COPROT1-BL (black) COPROT1-Y (yellow) EPDM protection for COUPL... series couplers		 COUPL1/2-F-B (COUPL1/2-F + COPROT1-B)	 COPRON2-B NYLON protection for COUPL... series couplers	 COUPL1/2-NB (COUPL1/2-M + COPRON2-B)		

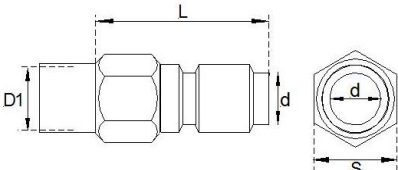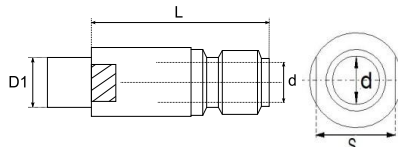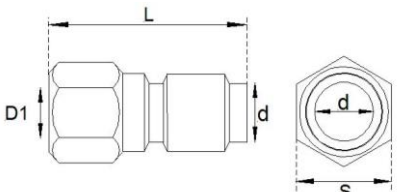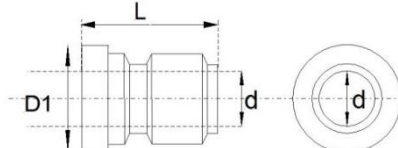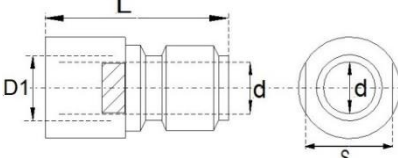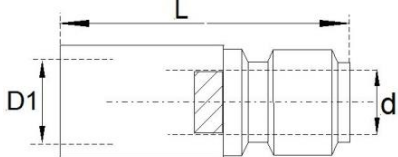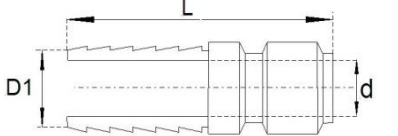

Adapter		Article no.	L (mm)	d (mm)	D1 (BSP)	S (mm)
 ADAPT3/8-M ADAPT1/2-M		ADAPT3/8-M ADAPT1/2-M	39,0 39,8	10,4 11,8	3/8" M 1/2" M	22 22
 ADAPN1/4-M		ADAPN1/4-M	42,0	8,0	1/4" M	16
 ADAPT1/4-F ADAPT1/2-F		ADAPT1/4-F ADAPT1/2-F	40,3 49,3	11,8 11,8	1/4" F 1/2" F	22 27
 ADAPW-11,5		ADAPW-11,5	30,0	11,5	19,9	-
 ADAPN3/8-F ADAPN1/2-F		ADAPN3/8-F ADAPN1/2-F	42,0 42,0	11,5 11,5	3/8" F 1/2" F	19 22
 ADAPN1/4-F ADAPN1/4F-S		ADAPN1/4-F ADAPN1/4-S	55,2 40,3	11,5 11,5	1/4" F 1/4" F	17 17
 ADAPH13 ADAPH16 ADAPH19		ADAPH13 ADAPH16 ADAPH19	57,5 64,0 65,2	10,0 10,0 10,0	D1 (mm) 12,8 – 13,3 15,8 – 16,8 19,1 – 19,9	

